



SUMITOMO Mounting

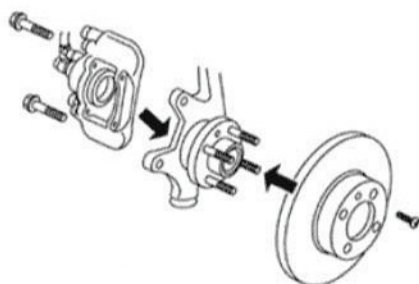


or

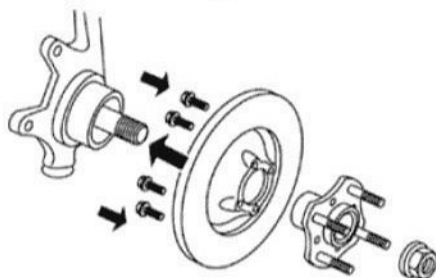


7

Fit the disc first, then the caliper.




8

Position the new pads and anti-noise protections.




9

Position the anti-noise protection and introduce the pad pins.



10


Replace the clip.



11


Depress the brake pedal several times to bring the pads together.

SUMITOMO Dismounting




1

Exert traction on the caliper against the disc to move the piston back.




2

Remove the clips.




3

Remove the pad pins and anti-noise protections.




4

Remove the pads and plate.

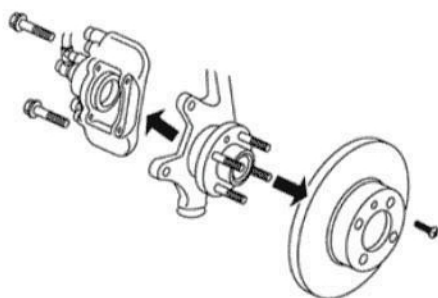


or

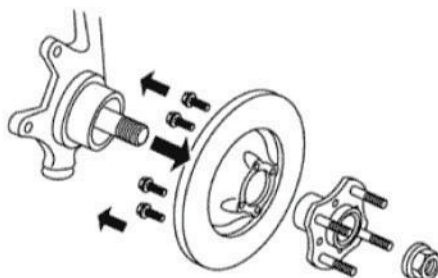

5

Remove the caliper first, then the disc.



6

Dry clean the caliper and the wheel hub.